


Dimension

Position	A ± 0.2	B ± 0.2	C ± 0.2	D
9	17.90	24.99	30.84	16.33
15	26.50	33.32	39.14	24.66
25	40.00	47.04	53.04	38.38
37	56.50	63.50	69.32	54.84

REV.	DESCRIPTION	DRAWN	CHECKED	APPROVED
A	NEW RELEASE	LJH 05/13/06'		LJC 05/13/06'
B	ADD SCREW TYPE	DMJ 06/27/07'		LJC 06/27/07'
C	整理图画	YCH 09/22/07'		LJC 09/22/07'
D	增加端子电镀全锡	YCH 03/12/08'		

- NOTES:
- PRODUCTS PERFORMANCE:
 - VOLTAGE RATING: 250V AC.
 - CONTACT CURRENT RATING: 1.5A MAX. PER PIN.
 - CONTACT RESISTANCE: 20m Ω MAX.
 - DIELECTRIC WITHSTANDING VOLTAGE: 500V AC(rms) FOR 1 MINUTE.
 - INSULATION RESISTANCE: 1000M Ω MINI.
 - TEMPERATURE RANGE: -45°C~+105°C.
 - PRODUCT NUMBER CODE:

- DS1037 - X X X X X X X X
- SCREW DIM. E
 - 4: 4.80mm
 - 5: 5.80mm
 - 6: 4.80mm(inside thread M2.6*0.45p, outside thread unc#4-40)
 - BOARD LOCK DIM. F
 - 4: 4.00mm
 - 7: 3.70mm
 - CONTACT PLATING
 - T: SELECTIVE GOLD FLASH
 - Si: FULL GOLD FLASH
 - 6: FULL TIN
 - COLOR OF HOUSING
 - K: BLACK
 - B: BLUE
 - SCREW TYPE
 - A: WITH SCREW TYPE
 - B: WITH RIVET TYPE
 - C: WITH SCREW AND RIVET TYPE
 - D: RIVET TYPE WITH SCREWS IN BULK PACKAGE
 - SHELL PLATING
 - N: Nickel
 - T: Tin
 - CONNECTOR TYPE
 - M: MALE
 - F: FEMALE
 - No. OF CONTACT
 - 09: 9pos. 25: 25pos.
 - 15: 15pos. 37: 37pos.

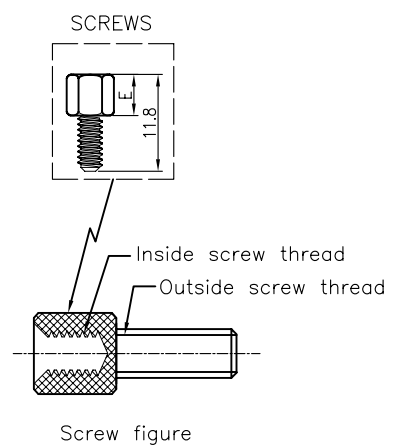

Tel: 86-574-63508787
Fax: 86-574-63510817

GENERAL TOLERANCE		ANGLE TOLERANCE		PROJECTION		TITLE	
X.	± 0.60	X.	$\pm 5^\circ$	UNITS	mm	D-SUB RIGHT ANGLE(7.2mm) TYPE	
.X	± 0.38	.X	$\pm 3'$	SHEET SIZE	A4	SERIES	DS1037 SERIES
.XX	± 0.25	.XX	$\pm 2'$	晨翔电子有限公司 CONNFLY CONNFLY ELECTRONIC CO. LTD			
DRAWING TYPE		CUSTOMER					
SCALE		1:1 SHEET 1 OF 1					
DRAWING NO.		C-DS1037-XXXXXXX		Add: West Yachuan Town Cixi Ningbo China P.C: 315321			